



Cable Trunking System

Cable Trunking Straight

Screw Fix Type

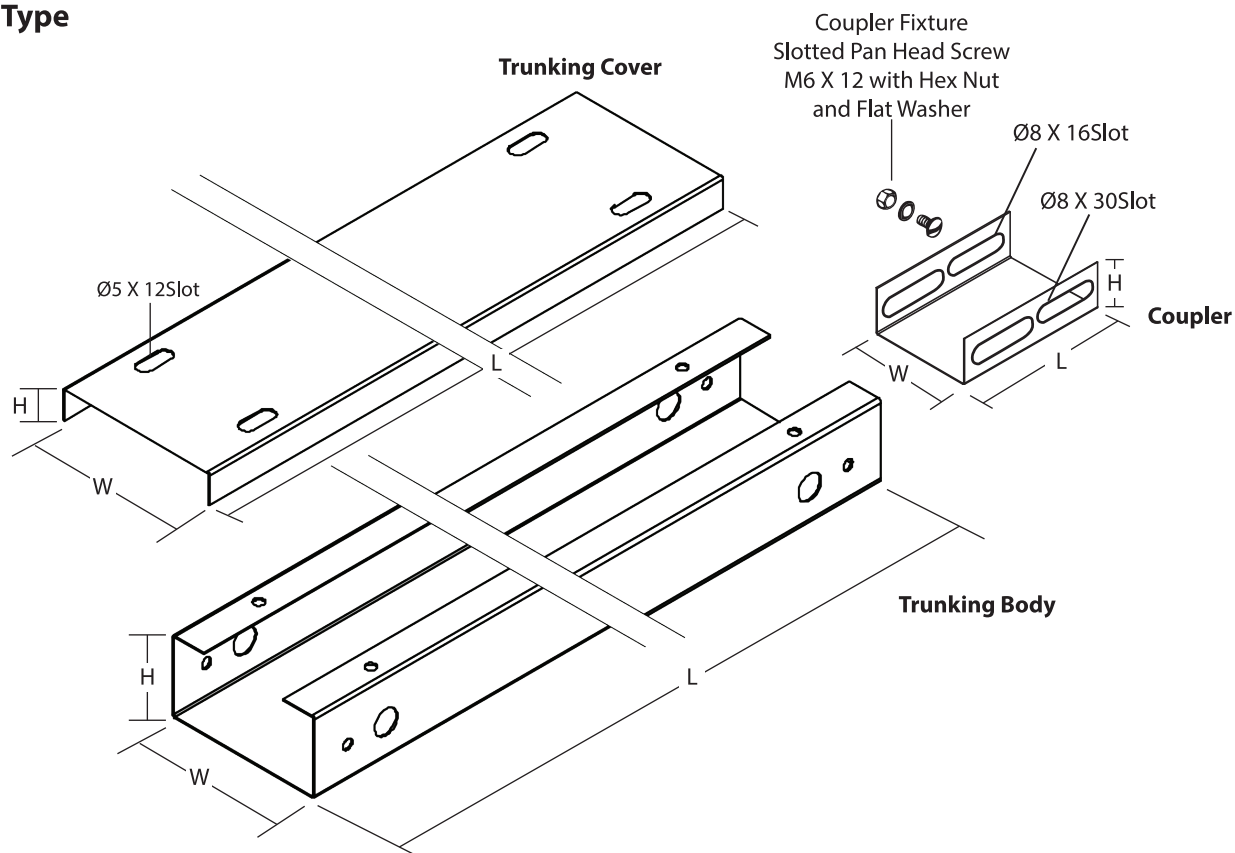

Turnbuckle Type

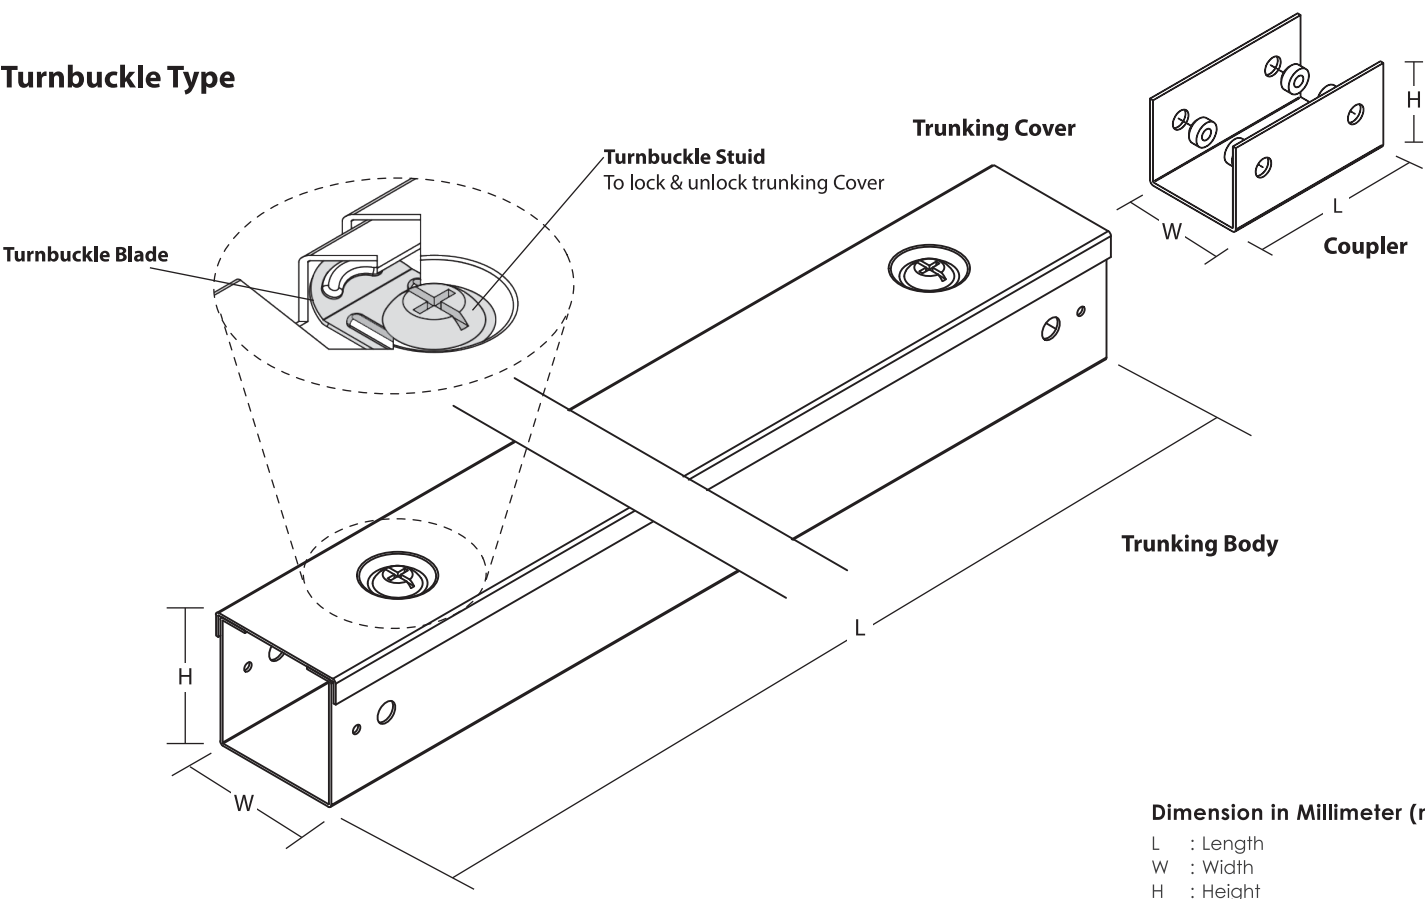

Dimension in Millimeter (mm)
L : Length
W : Width
H : Height

Screw Fix Type

Model	Size (mm)						Thickness (mm)	
	Cover (LxWxH)			Body (LxWxH)			Cover	Body
STK 1/2	2438 / 3000	54	10	2438 / 3000	50	25	1.0	1.0
STK 2/2		54	10		50	50	1.0	1.0
STK 2/3		79	10		75	50	1.2	1.2
STK 2/4		104	10		100	50	1.2	1.2
STK 2/6		155	10		150	50	1.4	1.6
STK 2/8		205	10		200	50	1.4	1.6
STK 2/10		255	10		250	50	1.4	1.6
STK 2/12		305	10		300	50	1.4	1.6
STK 2/14		355	10		350	50	1.4	1.6
STK 3/3		79	10		75	75	1.2	1.2
STK 3/4		104	10		100	75	1.2	1.2
STK 3/6		155	10		150	75	1.4	1.6
STK 3/8		205	10		200	75	1.4	1.6
STK 3/10		255	10		250	75	1.4	1.6
STK 3/12		305	10		300	75	1.4	1.6
STK 4/4		104	10		100	100	1.2	1.2
STK 4/6		155	10		150	100	1.4	1.6
STK 4/8		205	10		200	100	1.4	1.6
STK 4/10		255	10		250	100	1.4	1.6
STK 4/12		305	10		300	100	1.4	1.6
STK 6/6		155	10		150	150	1.4	1.6
STK 6/8		205	10		200	150	1.4	1.6

Size (mm)			
Coupler (LxWxH)			Thickness
80	46	21	1.0
	46	44	1.0
	72	44	1.2
	96	44	1.2
	144	40	1.6
	194	40	1.6
	244	40	1.6
	294	40	1.6
	344	40	1.6
	72	69	1.2
	96	69	1.2
	144	65	1.6
	194	65	1.6
	244	65	1.6
	294	65	1.6
	96	90	1.2
	144	90	1.6
	194	90	1.6
	244	90	1.6
	294	90	1.6
	144	120	1.6
	194	120	1.6

**Specification subject to change without prior notice.

Turnbuckle Type

Model	Size (mm)						Thickness (mm)	
	Cover (LxWxH)			Body (LxWxH)			Cover	Body
STK 1/2-TB	2438 / 3000	54	10	2438 / 3000	50	25	1.0	1.0
STK 2/2-TB		54	10		50	50	1.0	1.0
STK 2/3-TB		79	10		75	50	1.2	1.2
STK 2/4-TB		104	10		100	50	1.2	1.2
STK 2/6-TB		155	10		150	50	1.4	1.6
STK 2/8-TB		205	10		200	50	1.4	1.6
STK 2/10-TB		255	10		250	50	1.4	1.6
STK 2/12-TB		305	10		300	50	1.4	1.6
STK 2/14-TB		355	10		350	50	1.4	1.6
STK 3/3-TB		79	10		75	75	1.2	1.2
STK 3/4-TB		104	10		100	75	1.2	1.2
STK 3/6-TB		155	10		150	75	1.4	1.6
STK 3/8-TB		205	10		200	75	1.4	1.6
STK 3/10-TB		255	10		250	75	1.4	1.6
STK 3/12-TB		305	10		300	75	1.4	1.6
STK 4/4-TB		104	10		100	100	1.2	1.2
STK 4/6-TB		155	10		150	100	1.4	1.6
STK 4/8-TB		205	10		200	100	1.4	1.6
STK 4/10-TB		255	10		250	100	1.4	1.6
STK 4/12-TB		305	10		300	100	1.4	1.6
STK 6/6-TB		155	10		150	150	1.4	1.6
STK 6/8-TB		205	10		200	150	1.4	1.6

Size (mm)			
Coupler (LxWxH)			Thickness
80	46	21	1.0
	46	44	1.0
	72	44	1.2
	96	44	1.2
	144	40	1.6
	194	40	1.6
	244	40	1.6
	294	40	1.6
	344	40	1.6
	72	69	1.2
	96	69	1.2
	144	65	1.6
	194	65	1.6
	244	65	1.6
	294	90	1.6
	96	90	1.2
	144	90	1.6
	194	90	1.6
	244	90	1.6
	294	90	1.6
	144	120	1.6
	194	120	1.6

**Specification subject to change without prior notice.